

**Work Order ID 60430**

Wednesday, July 07, 2010 1:41:53 PM



Page 1

Item ID: D3976-1

Revision ID:

Item Name: Decal

Start Date: 7/7/2010 Start Qty: 10.00

Required Date: 7/21/2010 Req'd Qty: 10.00

Reference:

Approvals:

Process Plan: *MF*Date: *10-7-7*

Tooling:

Date:

Run Start



Stop



QC:

Date:

SPC (Y/N):

Date:

Sequence ID/  
Work Center IDOperation  
DescriptionSet Up/  
Run Hours

Tool ID

Tool #

Plan  
CodeAccept  
QtyReject  
QtyReject  
NumberInsp.  
Stamp

Draw Nbr

Revision Nbr

D3976

A

100

0.00



Purchasing

Memo

0.00

*CL 10/7/18 10*

Purchasing

Issue P/O: *12219*  
Manufacture as per Dwg D3976-1  
Possible Supplier: Studio Letrage  
Material release note is required

110

Receive &amp; Inspect for Damage &amp; Mat'l Certs

0.00



Packaging

Memo

0.00

*CL 10/7/12 10*

Packaging

W/O:		WORK ORDER CHANGES							
DATE	STEP	PROCEDURE CHANGE			By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_  
 Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

**Work Order ID 60430**

Wednesday, July 07, 2010 1:41:53 PM



Page 2

Item ID: D3976-1

Accept



Setup Start



Revision ID:

Item Name: Decal

Stop



Start Date: 7/7/2010 Start Qty: 10.00



Cust Item ID:

Required Date: 7/21/2010 Req'd Qty: 10.00



Customer:

Reference:

Approvals: Process Plan:

Date:

Tooling:

Date:

Run Start



QC:

Date:

SPC (Y/N):

Date:

Stop

Sequence ID/  
Work Center IDOperation  
DescriptionSet Up/  
Run Hours

Tool ID

Tool #

Plan  
CodeAccept  
QtyReject  
QtyReject  
NumberInsp.  
Stamp

120



QC

Quality Control

QC5- Inspect part completeness to step on W/O

0.00

S 10 07 12

0.00

130



Packaging

Packaging

Identify as per dwg &amp; Stock Location:

0.00

Memo

0.00

140



QC

Quality Control

QC21- Final Inspection - Work Order Release

0.00

Memo

0.00

W/O:		WORK ORDER CHANGES							
DATE	STEP	PROCEDURE CHANGE			By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

# Picklist Print

Wednesday, July 07, 2010 1:41:52 PM

Page 1

Work Order ID: 60430



Parent Item: D3976-1



Parent Item Name: Decal

Start Date: 7/7/2010

Required Date: 7/21/2010

Start Qty: 10.00

Required Qty: 10.00

Comments: IPP RevA: New issue DD verified by:EC

Component Item ID/ Item Name	Replacement Item ID	Mfg/ Purch	Bin Item	Primary Location	Last Location	Route Seq ID	Unit of Measure	Qty on Hand	Qty per Kit	Total Qty	Qty Issued	Date Issued	Status
D3976-1P 		Purchased		No		110	Each	0.0000	1	10		CL 10/7/12	(10)

Decal

W/O:		WORK ORDER CHANGES							
DATE	STEP	PROCEDURE CHANGE			By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

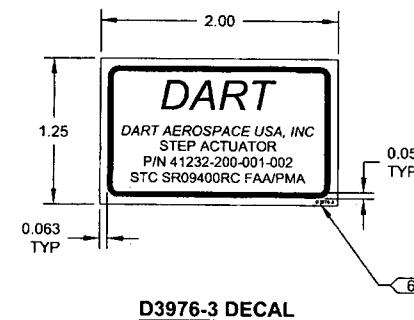
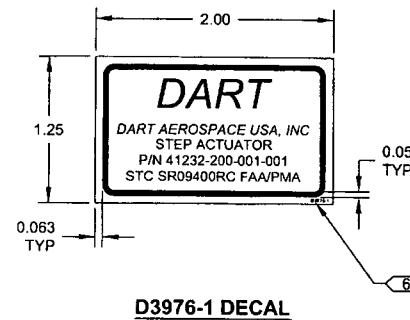
Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)							
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector	
			Initial Chief Eng	Action Description Chief Eng	Sign & Date				

NOTE: Date & initial all entries

8 7 6 5 4 3 2 1

HP 60430

**NOTES:**

- 1) MATERIAL: 220 SCOTCHCAL FILM, BY 3M.  
RED LETTERS & MARKINGS ON WHITE BACKGROUND  
REF CROSS REFERENCE Era DRAWING 41232-200-008
- 2) FINISH: N/A
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: N/A
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D3976-X"
- 7) WEIGHT: 0.01< LBS

8 7 6 5 4 3 2 1

A		NEW ISSUE		AJS	09.07.09
REV.		DESCRIPTION		BY	DATE
DESIGN	AJS	DART AEROSPACE USA, INC			
DRAWN	AJS	PORT HADLOCK, WA			
CHECKED		DRAWING NO.		REV. A	
MFG. APPR.		D3976		SHEET 1 OF 1	
APPROVED	AJS	TITLE		SCALE	
DE APPR.		DECAL - STEP ACTUATOR		NTS	
DATE	09.07.09	COPYRIGHT © 2009 BY DART AEROSPACE USA, INC THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC			

RELEASED  
2009-09-23  
AM

A

A

1

W/O:		WORK ORDER CHANGES							
DATE	STEP	PROCEDURE CHANGE			By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: \_\_\_\_\_ PAR #: \_\_\_\_\_ Fault Category: \_\_\_\_\_ NCR: Yes No DQA: \_\_\_\_\_ Date: \_\_\_\_\_

Resolution: \_\_\_\_\_ Disposition: \_\_\_\_\_ QA: N/C Closed: \_\_\_\_\_ Date: \_\_\_\_\_

NCR:		WORK ORDER NON-CONFORMANCE (NCR)							
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector	
			Initial Chief Eng	Action Description Chief Eng	Sign & Date				

NOTE: Date & initial all entries



Dart Aerospace Ltd.  
1270 Aberdeen Street  
Hawkesbury, ON K6A 1K7  
Tel: 613 632 9577  
Fax: 613 632 1053

## PURCHASE ORDER

Purchase Order ID **PO12219**

Purchase Order Date 7/08/10  
PO Print Date 7/08/10

Page Number 1 of 1

**Order From :**

STUDIO DE LETTRAGE 2001  
210 MAIN WEST  
HAWKESBURY, ON K6A 2H6  
CA

VC-STU001

Contact Name	Buyer	Chantal Lavoie
Vendor Phone	Requisition Nbr	
Vendor Fax	Tax Resale Nbr	10127-2607
Vendor Account Nbr	Terms	Net 30
	Currency	CAD
	FOB	

**Ship To :** DART AEROSPACE LTD 1270 ABERDEEN  
HAWKESBURY, ON K6A 1K7  
CANADA

**FAXED**  
CL 10/7/10  
e-mail signature

Line Nbr	Reference Revision ID	Description/ Mfg ID	Req Date/ Taxable	Req Qty/ Unit of Measure	Ship Method	Unit Price	Extended Price
1	D3976-JP	Decal	7/12/10 Yes	10.00 Each	Yours ppd	\$7.5000	\$75.00

**Special Inst:** AS PER DWG D3976 REV. A  
B60430

2	D3976-3P	Decal	7/12/10 Yes	10.00 Each	Yours ppd	\$7.5000	\$75.00
---	----------	-------	----------------	---------------	-----------	----------	---------

CL 10/7/112

**Special Inst:** AS ABOVE  
B60431

**PO Total:** \$150.00



No substitution or deviation without  
consent.  
Certificate of Conformity or Material  
Certification required when applicable

Change Nbr: 1

Change Date: 7/08/10

# STUD!O

DE LETTRAGE 2001

210 MAIN W.,  
HAWKESBURY, ONT.  
K6A 2H6  
Tel.: 613 632-2001  
Fax: 613 632-9491  
www.studiolettrage.com

INVOICE / FACTURE


VENDU À:  
SOLD TO:

Dart Aerospace Ltd  
1270 Aberdeen  
Hawkesbury, Ontario  
K6A 1K7

LIVRÉ À:  
SHIPPED TO:

Dart Aerospace Ltd  
Hawkesbury, Ontario

No.: 14185  
DATE: 07/12/2010  
PAGE 1 of 1  
Re: Quote No. 9193

ITEM ARTICLE	QTY QTE	UNIT UNITÉ	DESCRIPTION	GST TPS	PST TPV	UNIT PRICE PRIX UNITE	AMOUNT MONTANT
	10		D3976-1P set up	H		5.00	50.00
	10		D3976-3P set up	H		5.00	50.00
	1		printing —	H		25.00	25.00
			H - HST 13% HST				16.25
			PST Exempt: #6122-5207				
<i>5/10/07/12</i>							
<i>5/10/07/12</i>							
Studio de Lettrage HST #869034678RP001  PO 12219 Sold By							
<b>TOTAL</b>							
141.25							

Merci! Thank You!



# Scotchcal™ Opaque Imaging Media 8522

## Description

This media is specially formulated to dry quickly after printing. Production of outdoor weatherable and long-term indoor durable graphics is now easier than ever. Its changeable adhesive allows easy removal for up to one year.

## Advantages

- Optimized for use with selected Epson Stylus Pro printers and Epson Archival inks.
- Optimized for use with selected HP DesignJet Printers and HP DesignJet Ink System UV or HP83UV Color Ink System
- For making opaque, laminated graphics that are outdoor weatherable and long-term indoor durable
- Media:
  - For opaque (reflective) graphics
  - Changeable, easy to remove from warranted substrates up to 1 year later
  - Dries quickly after printing so the overlaminates can be applied almost immediately
  - Low slippage paper liner for superior tiling
- Overlaminate:
  - Provide additional UV (ultraviolet) and physical protection for making weatherable finished graphics
  - Available in luster and matte gloss
  - Adhesive allows for heat-assisted or cold-temperature lamination

## Applications and Uses

3M™ Scotchcal™ Changeable Opaque Imaging Media 8522 is intended only for ink jet printing and for use with the listed Compatible Products and Equipment and the following applications. Any other application is NOT warranted by 3M or covered by the worldwide 3M™ MCS™ Warranty unless 3M gives its prior written approval for the application.

- First surface images (the image is on top of the film) for opaque posters and signs, including:
  - Graphics for vans, personal vehicles, trucks and buses
  - Novelty posters
  - Retail and point-of-purchase displays
  - Information graphics such as maps and directories
  - Entertainment promotions in museums, zoos, parks, theatres, sports venues
  - Education and presentation graphics

## Product Bulletin 8522

Release F, Effective January 2003  
Black bar in margin indicates a change

- Legal and courtroom exhibits

- For flat or simple curved surfaces, with or without rivets, used in vertical ( $\pm 10^\circ$ ) applications

## Limitations of End Uses

The following uses and applications are specifically NOT warranted.

- Fleet applications in areas that use salt for winter road maintenance
- Application to non-warranted substrates, including wall-board
- Applications subjected to gasoline vapors or spills
- Application to corrugated or highly irregular surfaces or sharply raised areas
- Graphics applied to stainless steel, including stainless steel vehicles
- On flat surfaces with rivets, tenting of 4 to 10 mm around rivets may be expected; rivets may be cut around to eliminate tenting.

Note: Standard ink jet technology is water based. Water-based chemistry is susceptible to the extremes of heat and humidity. This is a factor in most product constructions on the market. Read the Fabrication, Shelf Life and Storage sections in this bulletin. Staying in the middle of these ranges always provides optimum performance.

## Compatible Products and Equipment

### Thermal Ink Jet Printing Systems

- Epson Stylus Pro 9500, Stylus Pro 10000 printer
  - Epson Archival Inks
- Epson Stylus Pro 10600 printer
  - Epson Archival Inks
- HP DesignJet Printers 2000 and 3000 series
  - HP DesignJet Ink System UV (pigment-based ink)
- HP DesignJet Printers 5000 series
  - HP83UV Color Ink System

### Overlaminate (required)

- 3M™ Luster Overlaminate 8519 (semi-gloss)
- 3M™ Matte Overlaminate 8520

Note: For the full product names of the 3M products listed on this page, please see page 1.

### Warranted Substrates

Media 8522 is warranted for use on the following rigid substrates.

Some substrates may "out-gas", resulting in tiny bubbles throughout the surface of the graphic. For maximum performance, be sure the substrate you select is properly cleaned and prepared as recommended by the manufacturer. See Instruction Bulletin 5.1 for additional information.

- Alodine (anodized aluminum)
- Automotive panels (automotive painted steel)
- Fruehauf (painted aluminum)
- FRP (fiberglass reinforced plywood)
- Glass
- Imron® (polyurethane-painted metal panel)
- Acrylic
- Sintra™ board

### Test and Approve Non-warranted Substrates Before Use

Media 8522 is not warranted for any substrate other than those listed above. If you want to use it for other substrates, 3M recommends that you test and approve the media for both adhesion and removal characteristics.

### Characteristics

Characteristic	Description
Media	7 mil, white, opaque graphic film
Liner	Low-slippage, lay flat paper
Adhesive	Changeable, pressure sensitive
Thickness (media and adhesive)	7.5 to 8 mil (nominal)
Application substrates	See Warranted Substrates, above
Application surfaces	Flat or simple curved surfaces, with or without rivets, used in vertical ( $\pm 10^\circ$ ) applications (no corrugations)
Application temperature range	28° to 110°F (-2° to 43°C) (air and surface)
Roll sizes	36" x 45 feet (914 mm x 13.5 m) 54" x 45 feet (1372 mm x 13.5 m)

### How to Become a 3M Ink Jet Registered Fabricator

Only 3M Thermal Ink Jet Registered Fabricators are eligible to offer 3M MCS warranted graphics. In order to become certified, a fabricator must complete the requirements as specified in the 3M Ink Jet Graphics Registered Fabricator Reference Manual located on the 3M website at [www.scotchprint.com](http://www.scotchprint.com)

### Effective Performance Life

To obtain the warranty given below, the graphics must be made according to 3M's recommendations which are detailed in the Warranty and Limited Remedies on page 3. Also see the section, Removability.

### Warranted Durability

Media 8522 with Overlaminate 8519 or 8520	Epson Printers		HP Printers	
	Outdoor	Indoor	Outdoor	Indoor
Applied to Warranted Substrates	2 years	5 years	3 years	5 years

### Removability

Imaging media 8522 is removable from warranted substrates for 1 year without the aid of chemical strippers or accessories. Refer to Instruction Bulletin 4.23 for additional information.

### Fabrication

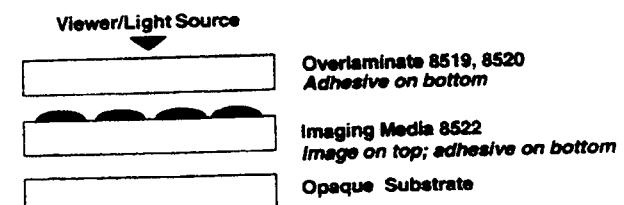
Graphics must be made according to 3M's recommendations which are detailed in the Warranty and Limited Remedies on page 3.

See Instruction Bulletin 4.23 for detailed fabrication, printing and mounting information.

### Graphic Construction Options

#### Opaque (Reflective) Graphics

Opaque graphics made with imaging media 8522 require an overlaminate and an opaque substrate.



Note: For the full product names of the 3M products listed on this page, please see page 1.

## Shelf Life and Storage

- 3M™ Scotchcal™ Changeable Opaque Imaging Media 8522 has a shelf life of one year.
- Storage conditions (new and partially used rolls). For optimum performance, use the middle of these ranges:
  - Original packaging, including plastic wrap
  - Relative humidity of 20% to 80%
  - Temperature of 33° to 104°F (0° to 40°C)
  - Away from direct sunlight
- Do not stack unprotected rolls or lay sharp or heavy objects on them.

## Health and Safety

### Caution

When handling any chemical products, read the manufacturers' container labels and the Material Safety Data Sheets (MSDS) for important health, safety and environmental information.

To obtain MSDS sheets for 3M products:

- By fax, call 1-800-364-0768 in the US and Canada or 1-650-556-8417 for all other locations.
- Electronically, visit us at <http://www.3M.com/msds>.
- By mail, or in case of an emergency, call 1-800-364-3577 or 1-651-737-6501.

When using any equipment, always follow the manufacturers' instructions for safe operation.

## Warranty and Limited Remedies

### 3M™ MCS™ Warranty for Graphics Produced on HP DesignJet Printers and Epson Stylus Pro Printers

*The following is made in lieu of all other express or implied warranties, including any implied warranty of merchantability or fitness for a particular purpose:* We warrant graphics produced by a 3M Ink Jet Registered Fabricator made with imaging media 8522, printed on an approved HP thermal ink jet printer according to HP's recommendations or Epson Stylus Pro printer according to Epson's recommendations, overlaminated with 8519 or 8520, and applied to a Waranted Substrate according to 3M's recommendations. These

graphics are covered against failure caused by ultraviolet light, temperature extremes, pollution, and other elements.

If a graphic fails to perform in accordance with 3M product specifications within this time frame, 3M will replace the materials at no charge. **These remedies are exclusive. In no case shall 3M be liable for any direct, indirect, or consequential damages, including any labor charges.**

## 3M Related Literature

Listed below is related 3M technical literature that may be of interest. You may view and print these Bulletins from our Web site at [www.scotchprint.com](http://www.scotchprint.com), or order them via our Fax-on-Demand (FOD) system. Call one of these phone numbers to order the desired bulletins, and specify the FOD document number provided in the chart.

United States or Canada: 1-800-364-0768  
International: 1-651-732-6506

Subject	Bulletin No.	FOD No.
<b>Product Bulletins</b>		
3M™ Scotchcal™ Overlaminate 8519 and 8520	8519/8520	4524
<b>Instruction Bulletins</b>		
Making thermal ink jet graphics	4.23	6523
Application, substrate selection, preparation and substrate-specific application techniques	5.1	7001
<b>Warranties</b>		
Worldwide 3M™ MCS™ Warranty Packet (includes all Commercial Graphics MCS Warranties)		9503
Worldwide 3M™ MCS™ Warranty Overview-Folder		9504

*3M, Scotchcal and MCS are trademarks of 3M. Epson and Stylus Pro are trademarks of Epson. HP and DesignJet are trademarks of Hewlett Packard. Sintra is a trademark of Swiss Aluminum Ltd. Imron is a registered trademark of DuPont in the United States*

## Bulletin Change Summary

The Epson Stylus Pro Printers 9500, 10000 10600, and Epson Archival Inks have been added to this bulletin. Additional changes resulting from this addition are marked with black bars in the margin.



### Commercial Graphics Division

3M Center, Building 220-6W-06  
PO Box 33220  
St. Paul, MN 55133-3220 USA  
General Info: 1-800-374-6772  
Technical Info: 1-800-328-3908  
Fax 1-651-736-4233  
Fax-on-Demand 1-800-364-0768 US/Canada or 1-651-732-6506 International  
Fax-on-Demand document: 4506  
[www.scotchprint.com](http://www.scotchprint.com)

### 3M Canada

P.O. Box 5757  
London, Ontario  
Canada N6A 4T1  
1-800-265-1840  
Fax 519-452-6245

### 3M México, S.A. de C.V.

Av. Santa Fe No. 55  
Col. Santa Fe, Del. Alvaro Obregón  
México, D.F. 01210  
52-55-52-70-04-00  
Fax 52-55-52-70-22-77

### 3M Puerto Rico, Inc.

Puerto Rico Industrial Park  
P.O. Box 100  
Carolina, PR 00986-0100  
787-620-3000  
Fax 787-750-3035